



1-Piece Fixing Ties with Fir Tree, with Disc

1-Piece Fixing Ties with Fir Tree, with Disc, for Round Holes


Primarily designed for fixing cable harnesses in the automotive industry, their simplicity and ease of use has resulted in these parts being used in other industries, for example aviation, switch gear manufacturer, white goods manufacturer.

Features and benefits


- Cable tie head always situated in defined position
- Easy to assemble without the need for a tool
- Disc adjusts tie for pressure from various directions and minimises access of dust, dirt and water
- Fir tree foot part can be used for a variety of panel thicknesses
- Suitable for use within threaded holes




**Material specification
please see page 22.**




T50SOSFT6-E2




T50SOSFT6D10E




T50SOSFT6LGE



T50SOSFT8E



T18RDP5

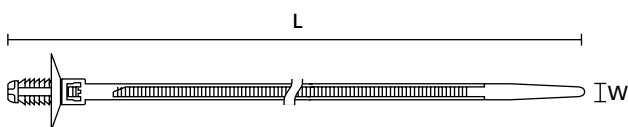


Fir tree foot part can be used for a variety of panel thicknesses



Fir tree foot parts can be used for a variety of panel thicknesses.



T50SOSFT6D10E - One piece fixing tie with fir tree foot part.

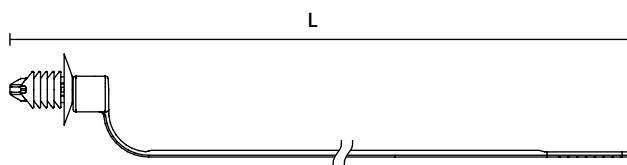

Special design without a gap between head and bundle; FT220DP7

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material	Colour	Tools	Article-No.
T18RDP5	2.5	110.0	20.0	80	13.0	4.9 - 5.1	3.0 - 4.0	PA66	Black (BK)	2;4-6	150-55610
T30SOS-AS-FT6-E	3.5	126.4	25.0	200	16	6.3 - 6.7	0.6 - 4.0	PA66HS	Black (BK)	2;4-6	157-00243
T50SOSFT6-E2	4.6	161.0	35.0	180	16.0	6.3 - 7.0	0.6 - 4.2	PA66HS	Black (BK)	2-10	157-00136
	4.6	160.0	35.0	180	16.0	6.3 - 7.0	0.6 - 4.2	PA66HS	Grey (GY)	2-10	157-00198
T50SOSFT6D10E	4.6	163.0	32.0	225	9.8	5.8 - 6.2	0.8 - 5.5	PA46	Grey (GY)	2-10	157-00028
	4.6	163.0	32.0	225	9.8	5.8 - 6.2	0.8 - 5.5	PA66HS	Black (BK)	2-10	157-00045
T50SOSFT8E	4.6	163.0	35.0	225	16.0	8.0 - 8.5	0.6 - 6.0	PA46	Grey (GY)	2-10	157-00115
	4.6	163.0	35.0	225	16.0	8.0 - 8.5	0.6 - 6.0	PA66HS	Black (BK)	2-10	157-00072
T50SOSFT6LGE	4.6	165.0	35.0	180	16.0	6.3 - 7.0	0.7 - 7.0	PA66HS	Black (BK)	2-10	157-00137
T50SOSFT6LG-E2	4.6	167.0	35.0	180	16.0	6.1 - 7.0 Round Hole 6.35	0.6 - 8.3	PA66HS	Black (BK)	2-10	157-00182
T50SOSFT6E	4.6	160.0	35.0	150	16.0	6.5 - 7.0	0.75 - 3.0	PA66HIRHS	Black (BK)	2-10	155-05800
T50SOSFT6-E3	4.7	161.0	35.0	150	16	6.1 - 6.9	0.7 - 3.5	PA66HIRHS	Black (BK)	2-10	157-00241

All dimensions in mm. Subject to technical changes.