



### Low Profile Convolute Boots

Helashrink 313C Series, with adapter lip

#### Features and Benefits


- For circular grooved adapters to provide strain relief
- Excellent environmental sealing with adhesive
- Convuluted design grants flexibility for different cable outlet angles



For Material / Adhesive information please refer to page 260, 261.



313C722-774 Series supplied / fully recovered.

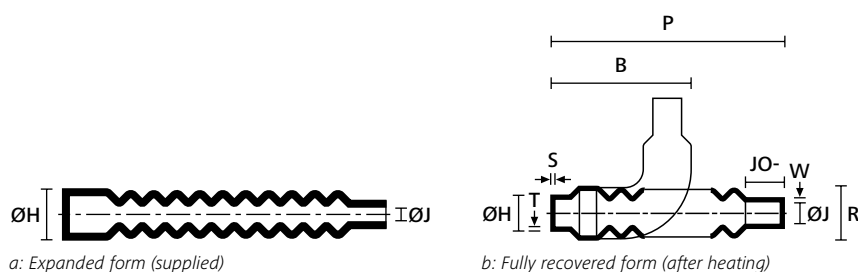

| TYPE      | ØH<br>min.<br>a | ØH<br>max.<br>b | ØJ<br>min.<br>a | ØJ<br>max.<br>b | P ±<br>10% | R<br>max. | JO ±<br>10% | W<br>min. | B<br>nom. | T ±<br>0.5 | S ±<br>0.5 | Article-No. |
|-----------|-----------------|-----------------|-----------------|-----------------|------------|-----------|-------------|-----------|-----------|------------|------------|-------------|
| 313C722-9 | 14.2            | 6.9             | 11.1            | 4.8             | 120.6      | 21.1      | 17.3        | 1.5       | 62.4      | 1.3        | 1.5        | 422-00001   |
| 313C732-9 | 22.4            | 11.7            | 17.7            | 8.1             | 133.3      | 26.5      | 19.8        | 1.5       | 67.8      | 1.3        | 1.5        | 422-00101   |
| 313C743-9 | 34.0            | 17.5            | 26.9            | 12.7            | 146.0      | 32.7      | 22.3        | 1.5       | 73.4      | 1.3        | 1.8        | 422-00201   |
| 313C753-9 | 44.2            | 22.3            | 36.5            | 17.5            | 158.7      | 37.8      | 25.4        | 1.5       | 78.2      | 1.3        | 1.8        | 422-00302   |
| 313C764-9 | 53.8            | 40.6            | 45.7            | 22.3            | 171.4      | 42.9      | 28.4        | 1.5       | 82.8      | 2.0        | 1.8        | 422-00400   |
| 313C774-9 | 77.2            | 40.6            | 54.6            | 22.8            | 236.2      | 62.2      | 25.4        | 1.5       | 138.4     | 2.0        | 2.0        | 422-00501   |

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes Catalogue.