



Pinched End Caps

Helashrink PEC Series, low voltage

Pinched End Caps can be used for mechanical and environmental protection of stub splices in electrical harnesses. Due to the fast and easy installation, these caps can be used for non-electrical applications as well.

Features and benefits

- Small size End Caps
- Fast and easy application
- With Inner adhesive layer for moisture sealing
- 3:1 shrink ratio
- Different diameters for wide application range
- Other lengths available on request




The appropriate end cap for every cable diameter, and cable types.



One Step to the Web!

MATERIAL	Polyolefin, cross-linked (PO-X)
Colour	Black (BK)
Shrink Ratio	3:1
Min. Shrink Temperature	+120 °C
Operating Temperature	-45 °C to +125 °C
Dielectric Strength	15 kV/mm according to IEC 684 P2
Flammability	self-extinguishing in 30 seconds according to SAE-AMS-DTL-23053/4

RoHS ✓

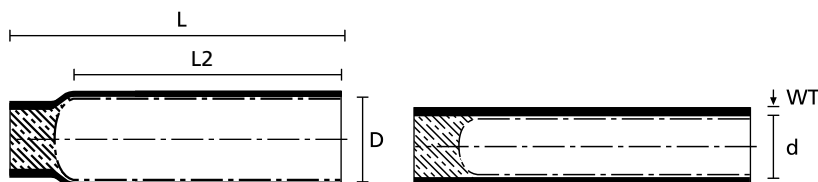

PEC-Series expanded

PEC-Series recovered

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Length (L2)	Pack Cont.	Article-No.
PEC-3/1	3.0	1.0	1.00	25.0	20.0	50 pcs.	416-00000
PEC-4.8/1.5	4.8	1.5	1.00	30.0	25.0	50 pcs.	416-00003
PEC-6/2	6.0	2.0	1.00	30.0	25.0	50 pcs.	416-00001
PEC-9/3	9.0	3.0	1.40	35.0	27.0	50 pcs.	416-00002

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.