



For strain relief

Strain relief grommets

Straining protection grommets are used as protection for cables and wires from pulling. They are also used for bend protection in casing apertures. They are especially useful in electrical equipment, for instance in electrical drills.

The use of Hellerine is recommended when working with grommets.

Features and benefits





- Provides excellent strain relieve
- Flexible and easy to apply
- High resistance to chemicals and environmental influences



Bend and strain protection on casings.

MATERIAL	Polyvinylchloride, flame retardant (PVC-FR)	Flexible Polyvinyl Chloride, cadmium free (PVC)
Operating Temperature	-30 °C to +60 °C	
Shore Hardness A	55±5	63±5
Flammability	UL 94 V0	UL 94 HB




TYPE	Drawing	Outside Ø (OD)	Outside Ø (OD2)	Outside Ø (OD3)	Ø (D)	Ø (D2)	Material	Colour	Pack Cont.	Article-No.
H125		9.0	6.0	-	4.0	3.5	PVC	Black (BK)	1,000 pcs.	634-31250
H126		9.0	6.0	-	5.0	4.5	PVC	Black (BK)	1,000 pcs.	634-31260
		9.0	6.0	-	5.0	4.5	PVC	Grey (GY)	1,000 pcs.	634-31268
H321		8.5	7.0	8.5	6.0	5.5	PVC-FR	Black (BK)	200 pcs.	634-03210
H3A		9.0	5.0	8.0	4.5	3.0	PVC-FR	Black (BK)	2,000 pcs.	634-00310
H4202		-	-	-	-	-	PVC-FR	Black (BK)	1,000 pcs.	634-04200
H119		7.0	4.5	6.5	4.5	3.0	PVC-FR	Black (BK)	2,000 pcs.	634-01190
H120		8.0	6.0	8.0	4.5	3.0	PVC-FR	Black (BK)	500 pcs.	634-01200
H121		11.0	8.5	-	8.0	7.0	PVC-FR	Black (BK)	500 pcs.	634-01210

All dimensions in mm. Subject to technical changes.




For strain relief


Strain relief grommets

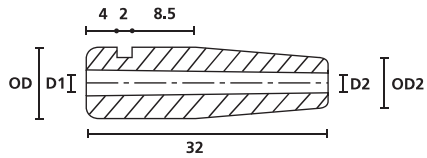


H125/H126

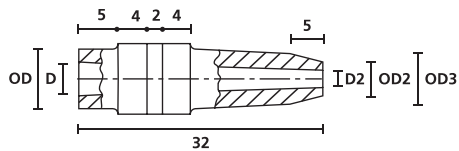


H119

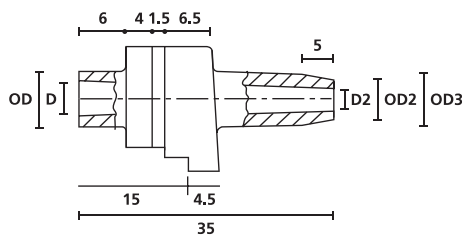


H120

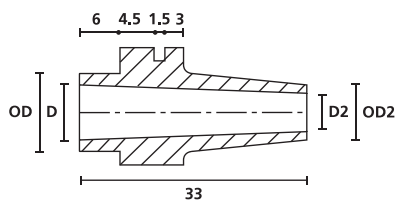


H121

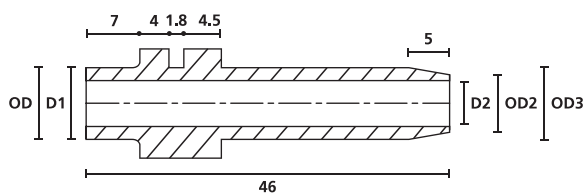

H321

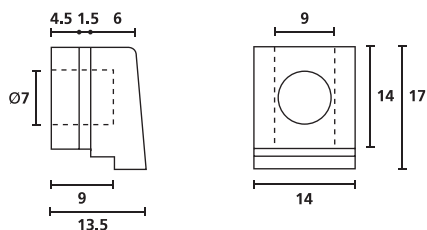

H4202

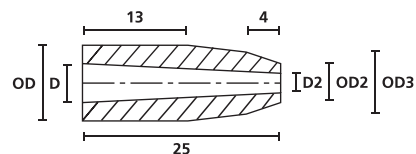

H3A