



Angle Shapes

Helashrink 1800 Series, with rib, 45° angle

Features and benefits


- Provides strain relief and mechanical protection for harness systems
- Use in conjunction with a circular grooved adaptor
- For use in elevated temperature scenarios



For Material / Adhesive information please refer to page 272, 273.



1837-5 supplied / fully recovered.

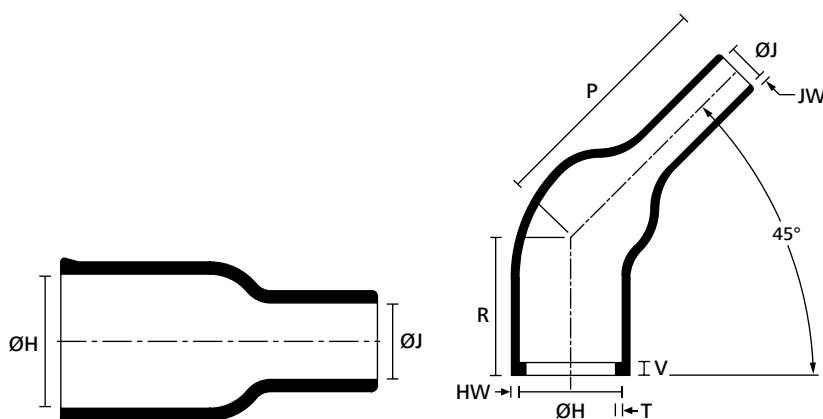

a: Expanded form (supplied)

b: Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R nom	HW ± 20 %	JW ± 30 %	V max	T ± 20 %	Article-No.
1834-5-L	10.0	6.6	4.0	2.0	14.2	15.2	1.0	0.6	1.5	0.6	418-34002
1835-5-L	15.0	7.6	7.0	3.5	15.7	16.3	1.0	0.6	1.5	0.6	418-35002
1836-5-L	19.0	9.9	8.0	4.0	19.0	12.7	1.0	0.6	1.5	0.6	418-36002
1837-5-L	27.0	13.9	11.0	5.8	29.9	19.0	1.0	0.6	1.5	0.6	418-37002

All dimensions in mm. Subject to technical changes. For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes catalogue.

