




## Fixing elements for parallel routing, twistable

### DSWS-Series

These fixing element for parallel routing can be used where bundles need separation from each other combined with the necessary functionality to support moving harnesses.

#### Features and benefits

- For parallel routing of bundles that can be twisted 360° even after setting
- Secure alignment to the bundle due to H-design
- Cable tie head can be moved after bundling
- For cable ties up to 12.7 mm wide
- For post-installation of bundles

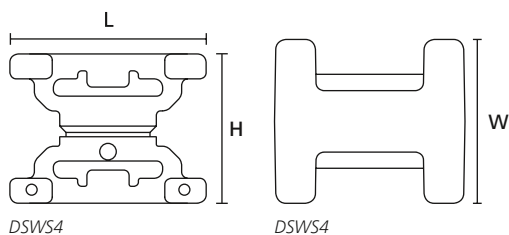

The spacers can be easily rotated by hand, allowing the bundles to be crossed and rotated at any angle.

TYPE	Drawing	Bundle Ø min.	Bundle Ø max.	Width (W)	Length (L)	Height (H)	Material	Colour	Pack Cont.	Article-No.
DSWS4		6.0	76.0	20.3	23.6	18.0	PA66HS, POM	Black (BK)	50 pcs.	151-00644
		6.0	76.0	20.3	23.6	18.0	PA66HS, POM	Black (BK)	2,200 pcs.	151-06500
DSWS5		16.0	152.0	25.4	40.6	23.6	PA66HS	Black (BK)	50 pcs.	151-06502

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.


## Fixing base

### LOK04-Series, spacer for parallel routing

The LOK04 spacer is ideal whenever two or more cables are routed in parallel.

#### Features and benefits

- For routing bundles over a distance in parallel
- Can be used with cable ties up to 9 mm cable tie width



LOK04 ring for parallel routing.



The LOK04 fixing base can ideally be combined with cable ties up to 9 mm cable tie width.

TYPE	Width (W)	Length (L3)	Strap Width max. (G)	Material	Colour	Article-No.
LOK04	16.0	4.0	9.0	PA66	Black (BK)	151-80400

All dimensions in mm. Subject to technical changes.



Add items to your watchlist!  
[www.HT.click/9-139](http://www.HT.click/9-139)



## Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)		<ul style="list-style-type: none"> <li>Corrosion resistant</li> <li>Antimagnetic</li> </ul>	RoHS
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)		<ul style="list-style-type: none"> <li>Weather resistant</li> <li>High yield strength</li> </ul>	RoHS
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0	<ul style="list-style-type: none"> <li>Resistance to radioactivity</li> <li>UV resistant, not moisture sensitive</li> <li>Good chemical resistance to acids, bases, oxidizing agents</li> </ul>	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Flexible at low temperature</li> <li>Not moisture sensitive</li> <li>Robust on impact</li> </ul>	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Bio-plastic, derived from vegetable oil</li> <li>Strong impact resistance at low temperature</li> <li>Very low moisture absorption</li> <li>Weather resistant</li> <li>Good chemical resistance</li> </ul>	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Good chemical resistance to acids, bases, oxidizing agents</li> <li>UV resistant</li> </ul>	HF RoHS
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2	<ul style="list-style-type: none"> <li>Resistance to high temperatures</li> <li>Very moisture sensitive</li> <li>Low smoke sensitivity</li> </ul>	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> </ul>	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> </ul>	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Good resistance to lubricants, fuels, salt water and solvents</li> </ul>	HF RoHS
Polyamide 6.6, heat and UV-stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK)	UL 94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Modified elevated maximum temperature</li> <li>UV resistant</li> </ul>	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Modified elevated maximum temperature</li> </ul>	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	RoHS
Polyamide 6.6, high impact modified, heat and UV-stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> <li>Modified elevated maximum temperature</li> <li>High yield strength, UV resistant</li> </ul>	RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> <li>Modified elevated maximum temperature</li> </ul>	RoHS
Polyamide 6.6, high impact modified, scan black)	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>UV resistant</li> </ul>	HF RoHS

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
<b>Polyamide 6.6,</b> with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB	• High yield strength • Metal and X-Ray detectable	HF RoHS
<b>Polyamide 6.6,</b> with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame retardant	• High yield strength • Metal and X-Ray detectable	HF RoHS
<b>Polyamide 6.6 V0</b>	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0	• High yield strength • Low smoke emission	HF LFH RoHS
<b>Polyester</b>	SP	-50 °C to +150 °C	Black (BK)		• UV resistant • Good chemical resistance to most acids, bases and oils	HF LFH RoHS
<b>Polyetheretherketone</b>	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V0	• Resistance to radioactivity • Not moisture sensitive • Good chemical resistance to acids, bases, oxidising agents	HF LFH RoHS
<b>Polyethylene</b>	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB	• Low moisture absorption • Good chemical resistance to most acids, bases, alcohol, oils	HF RoHS
<b>Polyolefin</b>	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0	• Low smoke emissions	HF LFH RoHS
<b>Polypropylene</b>	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL 94 HB	• Floats in water • Moderate yield strength • Good chemical resistance to acids, bases and solvents	HF RoHS
<b>Polypropylene, Ethylene Propylene Diene Terpolymer</b> rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB	• Good resistance to high temperature • Good chemical and abrasion resistance	HF RoHS
<b>Polypropylene</b> with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB	• Metal and X-Ray detectable • Heat resistant • Moderate yield strength • Good chemical resistance	RoHS
<b>Polypropylene</b> with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame retardant	• High yield strength • Metal and X-Ray detectable	HF RoHS
<b>Polyvinylchloride</b>	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0	• Low moisture absorption • Good chemical resistance to acids, bases, salts, alcohol, oils	RoHS
<b>Stainless Steel, Stainless Steel</b>	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning	• Corrosion resistant • Antimagnetic • Weather resistant • Chemical resistance • SS316 also resistant against seawater, salt spray and anorganic acids	HF LFH RoHS
<b>Thermoplastic Polyurethane</b>	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB	• High elasticity • Good chemical resistance to acids, bases and oxidising agents	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.


\*\*Further colours available on request.

\*These details are only guide values. They should not be regarded as a exhaustive material specification and are no substitute for suitability tests. Please see our datasheets for further details.

HF = Halogenfree

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances

 = Minimum Loop Tensile Strength  
for Cable Ties (newton)