


Technical data sheet

Article number:
157-00245

T50ROSFTOVALU

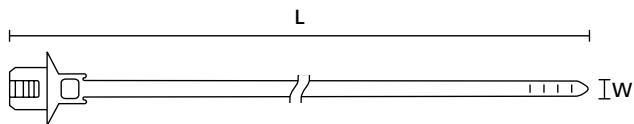

| | |
|--------------------------------------|--|
| Product Group | 1-piece fixing ties with fir tree, with disc |
| Product Family | for oval holes |
| Material | Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV) |
| Colour | Black (BK) |
| Application Tool | ProCut 9 no battery, EVOcut, MK9P, MK9P w/ Upper air, MK10-SB, MK21, EVO9SP, EVO9HT, EVO9i, EVO9iSP, EVO9iHT |
| Bundle Ø max. | 50.0 mm |
| Bundle Ø min. | 1.8 mm |
| Fixation Method | Fir Tree for oval holes |
| Flammability | UL 94 HB |
| for Hole Ø (FH) | 6.2 x 12.2 mm, 6.5 x 12.5 mm, 6.5 x 13.0 mm, 7.0 x 12.0 mm |
| Height (H) | 12.8 mm |
| Length (L) | 225.0 mm |
| Min.Tensile Strength | 222 N |
| Operating Temperature | -40 °C to +110 °C |
| Package Content packed in | bag |
| Pack Cont. | 500 pcs. |
| Panel Thickness | 6.0 mm |
| Panel Thickness max. | 0.6 - 6.0 mm |
| Panel Thickness min. (metric) | 0.6 mm |
| ROHS compliant | Yes |
| Variant | Outside Serrated |
| Width (W) | 5.1 mm |

