


## Technical data sheet

Article number:  
556-00846

**TAG250x33T1UHF**

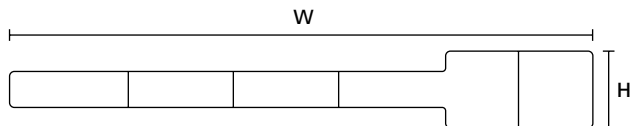

<b>Product Group</b>	Bundling labels with integrated RFID transponder, thermal transfer
<b>Product Family</b>	RFID label type 1603 – Ultra high frequency (UHF)
<b>Material</b>	Type 1603, Polyester (1603)
<b>Colour</b>	White (WH)
<b>Application Method</b>	The functionality and durability of the labels can be negatively affected if improperly processed or applied. All surfaces to be bonded must be clean, dry as well as free from dust and grease. Avoid touching the adhesive surface of the label as this could impair the application performance.
<b>Data Retention</b>	50 years
<b>Frequency</b>	860-960 MHz (UHF)
<b>Memory</b>	EPC: 96 bits, User memory: 512 bits
<b>Operating Temperature</b>	-50 °C to +80 °C
<b>Print Method</b>	thermal transfer print
<b>Radio protocol</b>	ISO 18000-6C, EPC Gen2
<b>Recommended Ribbon Type</b>	TT822OUT
<b>Self adhesive (Yes/No)</b>	Yes
<b>Storage conditions</b>	50% relative humidity.
<b>Storage Temperature</b>	+20 °C
<b>Type of RFID chip</b>	Alien Higgs 3
<b>Width (W)</b>	250.00 mm

